

Technical data sheet



Product features

Fry-top griddle plate electric smooth counter top 230 V

Model	SAP Code	00002992
--------------	-----------------	----------

- Top type: Smooth
- Griddle dimensions [mm x mm]: 570 x 240
- Griddle thickness [mm]: 8.00
- Container for liquid fat: Yes
- Independent heating zones: Separate control for each heating zone
- Maximum device temperature [°C]: 300
- Surface finish: sandblasted surface without coating

SAP Code	00002992	Power electric [kW]	2.400
Net Width [mm]	593	Loading	230 V / 1N - 50 Hz
Net Depth [mm]	366	Griddle dimensions [mm x mm]	570 x 240
Net Height [mm]	185	Top type	Smooth
Net Weight [kg]	16.50		

Technical data sheet






Technical drawing

Fry-top griddle plate electric smooth counter top 230 V

Model

SAP Code

00002992

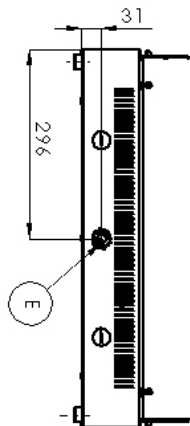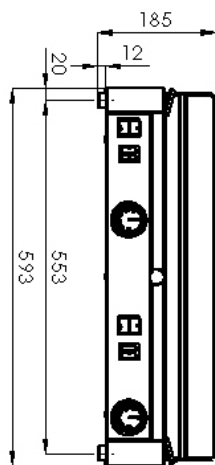

Technical data sheet



Product benefits

Fry-top griddle plate electric smooth counter top 230 V

Model	SAP Code	00002992
--------------	-----------------	----------

1

Small dimensions

low space requirements

- also usable for stall sales

Technical data sheet



Technical parameters

Fry-top griddle plate electric smooth counter top 230 V

Model	SAP Code	00002992
--------------	-----------------	----------

1. SAP Code:

00002992

15. Material:

Stainless steel

2. Net Width [mm]:

593

16. Indicators:

operation and warm-up

3. Net Depth [mm]:

366

17. Surface finish:

sandblasted surface without coating

4. Net Height [mm]:

185

18. Maximum device temperature [°C]:

300

5. Net Weight [kg]:

16.50

19. Minimum device temperature [°C]:

50

6. Gross Width [mm]:

470

20. Adjustable feet:

Yes

7. Gross depth [mm]:

640

21. Griddle dimensions [mm x mm]:

570 x 240

8. Gross Height [mm]:

230

22. Griddle thickness [mm]:

8.00

9. Gross Weight [kg]:

17.00

23. Container for liquid fat:

Yes

10. Device type:

Electric unit

24. Independent heating zones:

Separate control for each heating zone

11. Construction type of device:

Table top

25. Uniform heating:

Yes

12. Power electric [kW]:

2.400

26. Top type:

Smooth

13. Loading:

230 V / 1N - 50 Hz

27. Power consumption of the zone 1 [kW]:

1,2

14. Protection of controls:

IPX4

28. Power consumption of the zone 2 [kW]:

1,2