



#### Undercounter dishwasher double skin 40x40 - 230 V

**Model SAP Code** 00011272



- Display type: LCD multifunction display
- Number of programs: 9
- Number of skin: 2
- Door clear height [mm]: 320
- Rack size [mm]: 400 x 400
- Water consumption of the washing cycle: 1,2
- Washing cycle time [s]: 90-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ProGressive + Evolution3 triple filtration captures particles up to 0.8 mm in size, electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water into the waste


SAP Code	00011272	Boiler power [kW]	2.600
Net Width [mm]	466	Basin volume [l]	8
Net Depth [mm]	556	Tank power [kW]	0.600
Net Height [mm]	695	Water consumption of the washing cycle	1,2
Net Weight [kg]	47.00	Washing cycle time [s]	90-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400
Boiler capacity [ l ]	2.60		



Technical drawing

Undercounter dishwasher	double skin	40x40 - 230 V
-------------------------	-------------	---------------

Model SAP Code 00011272

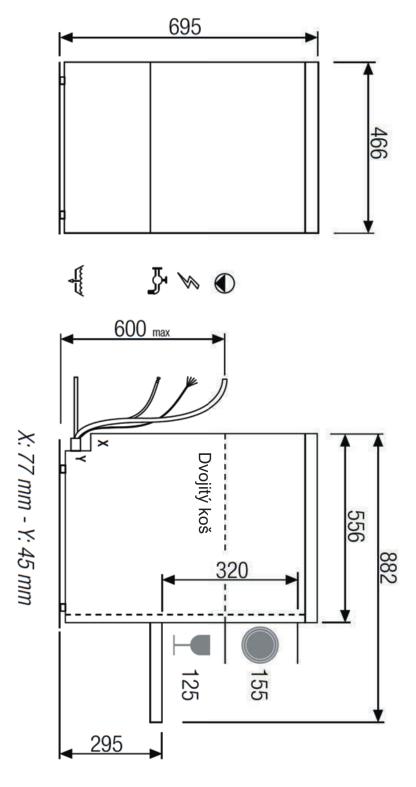





#### Undercounter dishwasher double skin 40x40 - 230 V

Model SAP Code 00011272

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning
- increased user comfort
- 2 LED Display proScreen 4 local display + 2 LED strips

p. 1. 6.1. 1.1. 1.

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath
- Fast heating

  Performance management allows the current running of the boiler and basins body
  - quick first warm-up of the dishwasher
  - smooth operation
  - Protection of fragile dishes
    softstart system for gradual start of washing programs to protect fragile dishes
    - protects stemmed glasses and other fragile utensils
- Double shell construction

stainless steel construction with insulated double jacket

- quiet operation
- energy saving
- Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving
- Fast heating
  performance management allows the current running of the boiler and basins body
  - quick fault finding
  - transfer of original recipes
  - keeping software up to date



### Technical parameters


Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011272
<b>1. SAP Code:</b> 00011272		<b>15. Number of programs:</b> 9
2. Net Width [mm]: 466		<b>16. Opening of device:</b> Tilting down
3. Net Depth [mm]: 556		17. Door clear height [mm]: 320
4. Net Height [mm]: 695		<b>18. Adjustable feet:</b> Yes
5. Net Weight [kg]: 47.00		19. Number of skin:
<b>6. Gross Width [mm]:</b> 560		20. Self-cleaning cycle: Yes
7. Gross depth [mm]: 660		21. Boiler capacity [ l ]: 2.60
8. Gross Height [mm]: 870		<b>22. Boiler power [kW]:</b> 2.600
<b>9. Gross Weight [kg]:</b> 50.00		23. Basin volume [l]:
10. Device type: Electric unit		<b>24. Tank power [kW]:</b> 0.600
11. Control type: Digital		25. Number of arms for both rinsing and washing:
12. Material: Stainless steel		26. Arm connection: Hand loosen/tighten screw
13. Power electric [kW]: 3.500		27. Washing arm type: Rotatable two-pronged

14. Loading:

230 V / 1N - 50 Hz

28. Washing arm material:

Stainless steel





Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011272

#### 29. Atmospheric boiler with rinse pump:

Yes

#### 30. Rinsing arm type:

Rotating two-pronged

#### 31. Rinsing arm material:

Stainless steel

#### 32. Deep drawn tank:

Yes

#### 33. Rack support:

Pressed

#### 34. Tank surface strainers:

stainless steel

#### 35. Drain filter:

ProGressive + Evolution3 - triple filtration captures particles up to 0.8 mm in size, electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water into the waste

#### 36. Thermostop:

Yes

#### 37. Boiler thermostat adjust:

Yes

#### 38. Rack feed capacity:

24-30-40

#### 39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

#### 40. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

#### 41. Rinse system:

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

#### 42. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

#### 43. Quick heating system:

QuickReady - System for rapid heating of water in the tank

#### 44. Hot water electric valve:

Yes

#### 45. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

#### 46. Rack size [mm]:

400 x 400

#### 47. Display type:

LCD multifunction display

#### 48. USB port:

Yes, for Firmware actualisation

#### 49. Drain pump:

Yes

#### 50. Self-diagnostics:

Yes



### Technical parameters

Undercounter dishwasher double skin 40x40 - 230 V				
Model SAP Code	00011272			
<b>51. Wash pump type:</b> two-way - DuoFlow	<b>60. Program ProFessional:</b> Yes			
<b>52. Detergent dispenser:</b> Yes	<b>61. Program ProTemp:</b> Yes			
53. Rinse aid dispenser: Yes	<b>62. Program ProClean:</b> Yes			
<b>54.</b> Water consumption of the washing cycle: $1,2$	63. Program ProDrain: Yes			
<b>55. Washing cycle time [s]:</b> 90-120-150	<b>64. Program ProNew:</b> Yes			
<b>56. Rinse water temperature [°C]:</b> 85	<b>65. Program ProPlates:</b> Yes			
<b>57. Standard equipment for device:</b> 2x glass basket, 1x cutlery basket	<b>66. Program ProCold:</b> Yes			
<b>58. Additional information:</b> The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free	<b>67. Program ProWater:</b> Yes			

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

59. Program ProSpeed:

Yes