

# Technical data sheet

## Product features



### Blast chiller/freezer 10x GN 2/1 TouchScreen stainless steel 400 V right door

<b>Model</b>	<b>SAP Code</b>	00009366
--------------	-----------------	----------



- Shock cooling cycle kg / min (+3 ° C): 70/90
- Shock freeze cycle kg / min (-18 ° C): 50/240
- Maximum device temperature [°C]: -40
- Probe: 4-points
- Insulation thickness [mm]: 80
- Control type: Touchscreen
- Display size: 9
- User programmable cycles: Yes
- Thaving cycle: Yes

<b>SAP Code</b>	00009366	<b>Number of GN / EN</b>	10
<b>Net Width [mm]</b>	790	<b>GN / EN size in device</b>	GN 2/1
<b>Net Depth [mm]</b>	839	<b>GN device depth</b>	65
<b>Net Height [mm]</b>	1650	<b>Shock cooling cycle kg / min (+3 ° C)</b>	70/90
<b>Net Weight [kg]</b>	190.00	<b>Shock freeze cycle kg / min (-18 ° C)</b>	50/240
<b>Power electric [kW]</b>	2.390	<b>Control type</b>	Touchscreen
<b>Loading</b>	400 V / 3N - 50 Hz		

# Technical data sheet

Technical drawing




Blast chiller/freezer 10x GN 2/1 TouchScreen stainless steel 400 V right door

Model

SAP Code

00009366

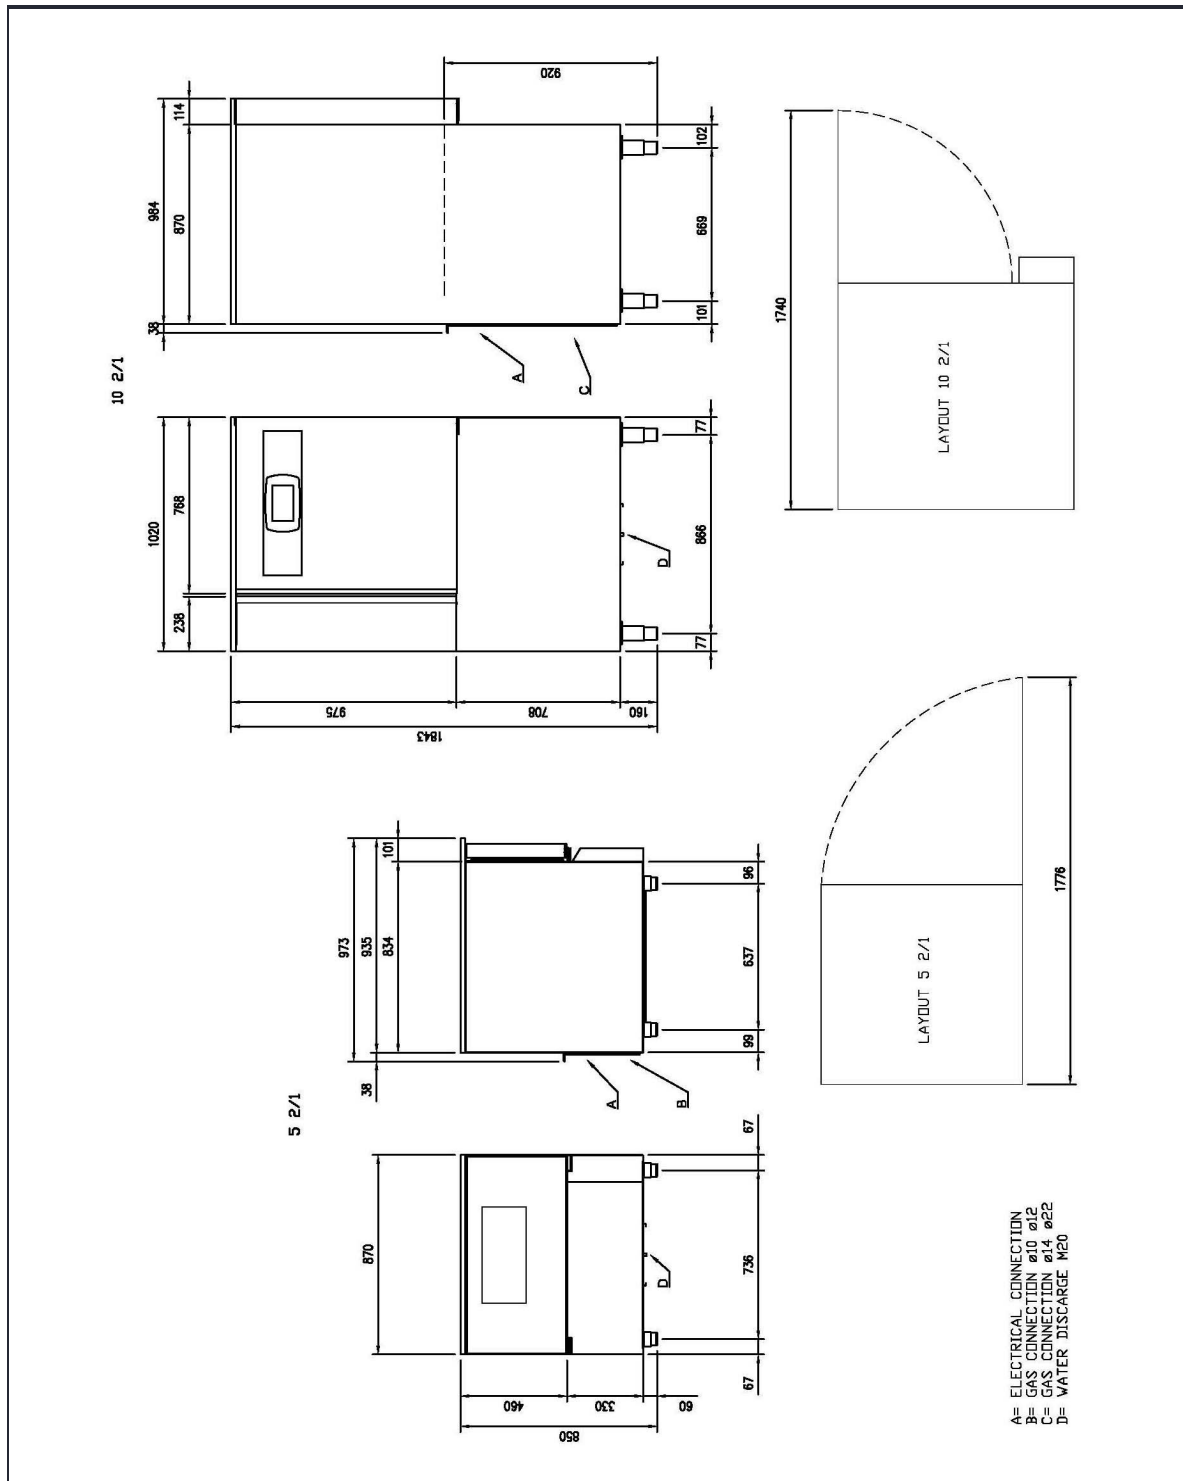

# Technical data sheet

Product benefits



## Blast chiller/freezer 10x GN 2/1 TouchScreen stainless steel 400 V right door

Model

SAP Code

00009366

1

### Stainless steel body and interior

endurance  
hygiene

- thanks to the all stainless steel construction it is very easy to maintain and thus saves costs
- meeting hygiene standards

2

### Monitoring of HACCP parameters

easy registration of all necessary parameters

- hassle-free proof of proper food handling in the event of an inspection

3

### Multipoint probe

precise monitoring of the cooling/freezing temperature

- food safety is better ensured thanks to the probe
- saves energy and time by stopping cooling/freezing when temperature is reached

4

### Thawing

readiness of frozen food for processing on time

- time saving
- controlled food handling

# Technical data sheet

Technical parameters



## Blast chiller/freezer 10x GN 2/1 TouchScreen stainless steel 400 V right door

**Model**

**SAP Code**

00009366

**1. SAP Code:**

00009366

**2. Net Width [mm]:**

790

**3. Net Depth [mm]:**

839

**4. Net Height [mm]:**

1650

**5. Net Weight [kg]:**

190.00

**6. Gross Width [mm]:**

846

**7. Gross depth [mm]:**

860

**8. Gross Height [mm]:**

1780

**9. Gross Weight [kg]:**

248.60

**10. Device type:**

Electric unit

**11. Material:**

AISI 304

**12. Device color:**

Stainless steel

**13. Opening of device:**

Hinges on the right

**14. Power electric [kW]:**

2.390

**15. Loading:**

400 V / 3N - 50 Hz

**16. Control type:**

Touchscreen

**17. Display size:**

9

**18. Refrigerant:**

R452a

**19. Number of GN / EN:**

10

**20. GN / EN size in device:**

GN 2/1

**21. GN device depth:**

65

**22. Maximum device temperature [°C]:**

-40

**23. Shock freeze cycle kg / min (-18 °C):**

50/240

**24. Shock cooling cycle kg / min (+3 °C):**

70/90

**25. Insulation thickness [mm]:**

80

**26. Long-term cooling function:**

Yes

**27. Longterm freezing function:**

Yes

**28. Probe:**

4-points

# Technical data sheet

Technical parameters



## Blast chiller/freezer 10x GN 2/1 TouchScreen stainless steel 400 V right door

**Model**

**SAP Code**

00009366

### 29. Self-diagnostics:

Yes

### 30. Interior lighting:

Yes

### 31. HACCP:

Yes

### 32. Filter:

Removable

### 33. Thaving cycle:

Yes

### 34. User programmable cycles:

Yes

### 35. USB port:

Yes, for HACCP and firmware update

### 36. Castors:

Optional

### 37. Real time monitoring paramaters:

Energy consumption, Chamber temperature, Probe temperature, Graph with the course of temperature and consumption